


# EXALT

Exalt is a selection of marbles that offers the aesthetic of high-class material that embodies a strongly stated elegance. In their quest to make a true interpretation of these marbles, Cerim is taking advantage of the latest inkjet technology that allows them to layer white glazes over colors. This creates one of the most realistic marble looks available, as there are no visible pixels. It really looks like there are veins underneath the surface. With two white marbles, a soft gray and a crosscut onyx, this is a collection that brings authentic beauty to any project.




MAGIC WHITE

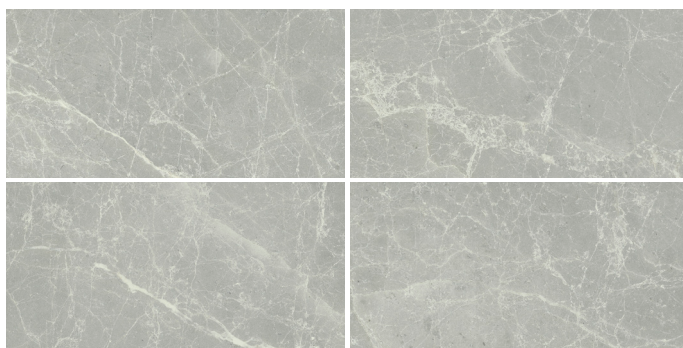

SILVER LIGHT



FAIRY WHITE

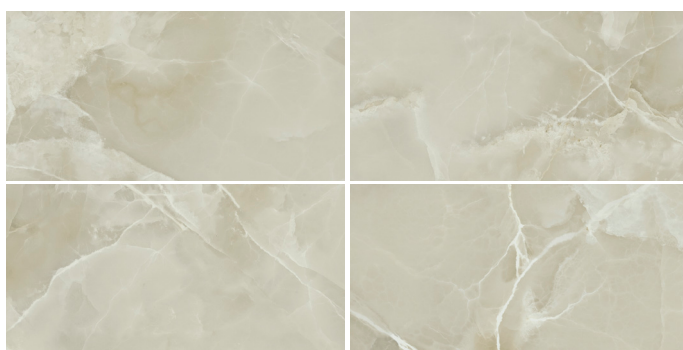

OYSTER SHADE

Colors are intended as a guide only and may vary from actual tile. Sizes listed are nominal. Please check samples before making final selection and to get actual dimensions for layout. See reverse side for additional product information.

## PRODUCT INFORMATION

### COLORS

CMETFW	Fairy White (Bianco Carrara)
CMETMW	Magic White (Bianco Bella)
CMETOS	Oyster Shade (Honey Onyx)
CMETSL	Silver Light (Montecarlo Quartzite)

### SIZE

#### Natural Finish - Rectified

12 x 24	CMET--N /1224
2 x 2 Mosaic	CMET--N/22
4" Hex*	CMET--N/4HX

\*The 4" Hex is only available in Fairy White (FW) and Magic White (MW).

#### Lucido Finish (Polished) - Rectified

12 x 24	CMET--L/1224
---------	--------------

### TRIM

#### Natural Finish - Rectified

Surface Bullnose 2 x 24	CMET--N /SBN224
-------------------------	-----------------

#### Lucido Finish (Polished) - Rectified

CMET--L/SBN224
----------------

The Surface Bullnose is made by cutting field tile, grinding the edge and reglazing it.

4" Hex

4" Hex is only available in Fairy White (FW) and Magic White (MW).



CMETFWN/4HX



CMETMWN/4HX

### INSTALLATION INFORMATION

Most Italian manufacturers recommend a maximum offset of 8" (20cm) on all large format tiles when setting a running bond. Please refer to ANSI requirements for setting large format tiles, ANSI A 108.2 Section 4.3.8. There are special setting requirements and materials for large format tiles. Please refer to the TCNA Handbook and guidelines by your mortar manufacturer for more information. Using a leveling system can improve the installation of this product.

### NATURAL FINISH USAGE

Natural Finish is suitable for walls and residential and light to moderate commercial floors.

### LUCIDO (Polished) CLEANING AND MAINTENANCE

Lucido Finish is suitable for walls and residential and light to moderate commercial floors that do not require DCOF. As with all shiny material, the polished surface is susceptible to scratching during installation and use, and extra care should be taken when handling and grouting. The factory does not recommend sealing or treating this material.

Polished material can be etched with acids. Avoid detergents, solvents or acid-based products containing hydrochloric acid, citric acid, acetic acid or abrasive components. Do not use cleaning agents like abrasive cleaners which might scratch the surface. It is advisable to test a small area in a not highly visible section of the tiles before proceeding to clean the whole surface.

### TECHNICAL INFORMATION

Physical Properties	Norms	Value	
		Natural Finish	Lucido Finish
Flexion Resistance	10545-04	52 N/mm <sup>2</sup> (average value)	
Water Absorption	10545-03	≤0,08%	
Frost Resistance	10545-12	No Damage	
** Dynamic (DCOF) Coefficient of Friction	DCOF	Wet ≥ 0.42	—



U.S. GREEN  
BUILDING  
COUNCIL

**TILESHOP**



www.tile-shop.com

MADE IN ITALY

TSCMET/200710